

Safe2Go

VT300



Please read the instruction before installing and using the watch.

Product color in kind prevails!

1. Before using

a. Check whether the watch is the purchased model and has complete accessories: 1GPS Watch with silicon wristband, 1 USB Cable, 1 User manual, 1 Hatch opener for SIM-card.

b. Use only SIM card and operator that supports GSM network (2G). SIM card need to enable GPRS data and caller ID function, Recommendation: 30 MB data per month should be enough.

c. Turn off the watch before installing the SIM card.

d. Charge the battery by connecting to a computer with the

matched USB cable. Do not charge over 3 hours.

Note: Charging the battery should only be under adult supervision.

e. Please scan the barcode of this manual last page to download the APP Setracker on your phone.

2. Watch interface



2.1 Product function

- GPS+LBS+WIFI three ways real-time Positioning
- 0.66 OLED health eye shield screen
- Footprints: record history route
- Voice monitoring: Once the phone number confirmed, watch will call the number automatically while user don't know.
- Two-way phone call and voice chat
- Records of step count, amount of exercise, distance and sleep monitor.
- App available on IOS and Android Platform



- Setting no disturbing time when kids on class
- GEO fence safety area
- SOS Phone call and alert
- Watch removed and low power alarm
- Remote shutdown
- Waterproof:IP68, underwater 1-3meter for 30mins
- Make friends between watches

Note: It's better not to wear the watch swimming.

3. Watch function instruction

3.1 Phone book: press the button 4 you can see 10 phone number and pick number to dial.

3.2 Talk: Long press the button 1 to recording voice message and released to send to mobile phones, the longest voice message is 15 seconds.

3.3 Touch make friends: press button 2 to enter the make friend interface, with 2 watches supports make multi friends (or 2 watches supports make single friend), have same time and connects the network, both watch will add each other.


4. Set up watch with App

4.1 APP Registration and login

App only available on IOS and Android , Windows phones do not support. Search "Setracker" on App store and Google play or scan the bar code of the last page manual to download and enter the following page shown on the pic1.

Fill into the unique ID or REG CODE which you can see on the back side of the watch(by scanning the QR code or entering the ID manually) and unique user name (at least 4 characters, whether letter or number) before login, the P-number is parents' number, then set the password (at least 6 characters),at last select the server location which your country belongs to.


The login interface is shown as below: pic2

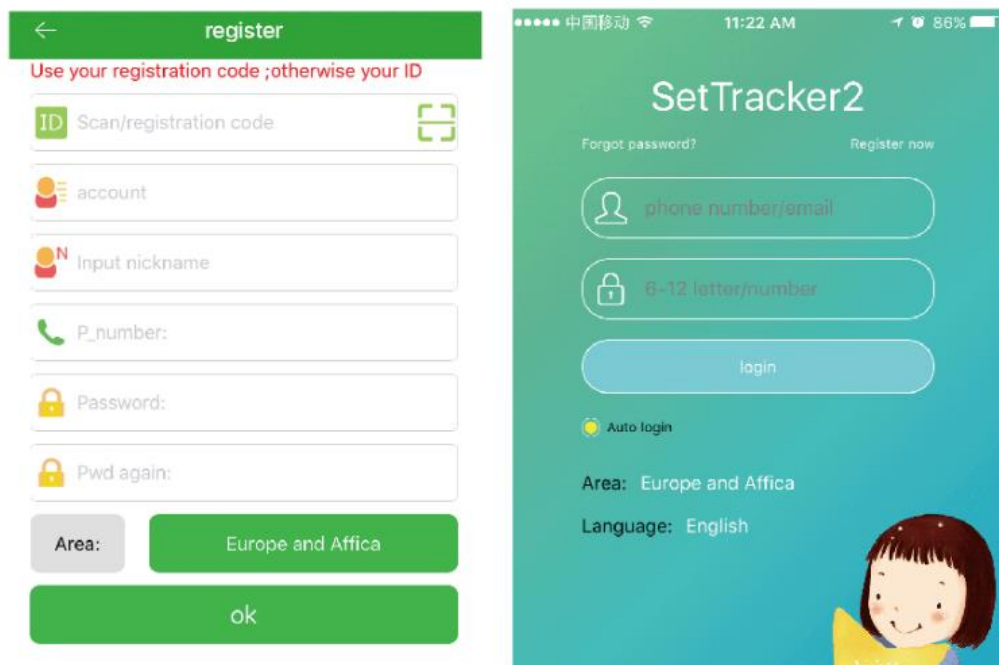

4.2 Introduction of APP main interface

Enter the correct account and password on the login interface,

click to login and enter the main interface. The main interface is shown as below:

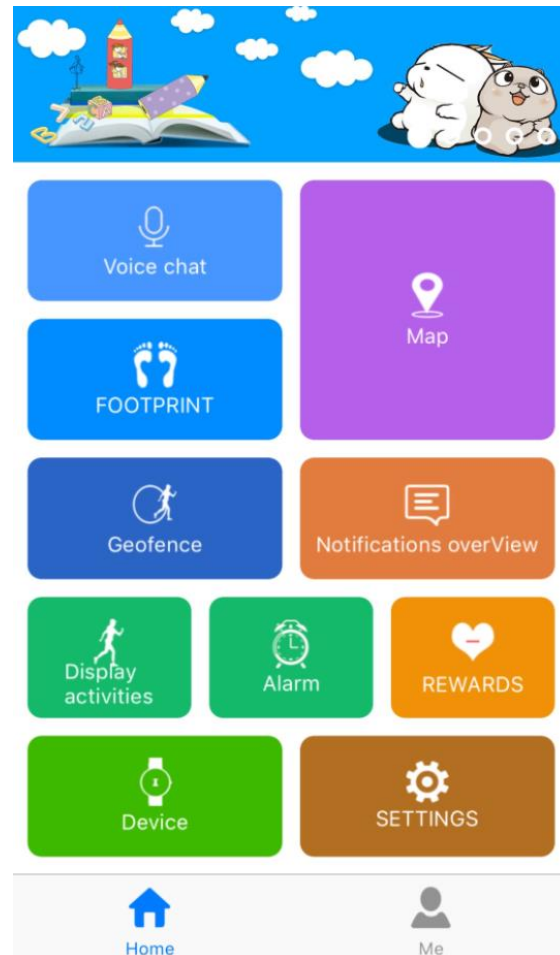


Description of functions:

(1) Voice chat: Click “Long press and speak” to start recording. Release the button to send the message. The longest voice message can be 15 seconds. Meanwhile, you can also write short message to the watch. Like “I am here”.

(2) Map: Check the position of the watch in real time. Each positioning working time is 3 minutes. The interval time for location data updating need 20 seconds. After 3 minutes, device will back to the default working mode. You can know the real-time location in

the map. When location icon is **Red**, it is in GPS location, **Blue** is in LBS location, **Green** is WIFI location.

(3)**Settings:** you can set all parameters of the watch, settings interface shown as below:

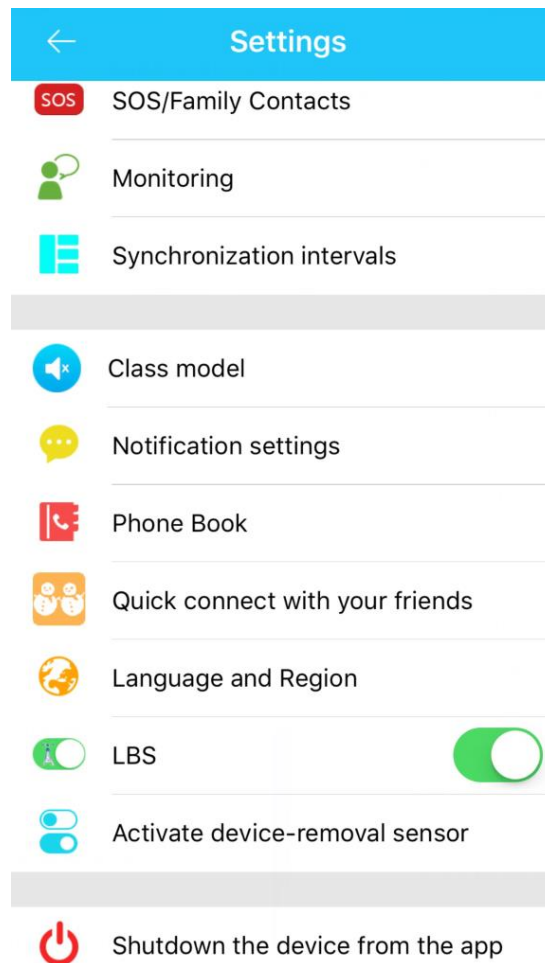

a. SOS number: three numbers can be set up, the watch will calling to the phone automatically by pressing the watch SOS button for 3 seconds in case of an emergency, and there will have alert message sent to APP. Three phone numbers will be called one after another twice (unless the call is answered).



b. Monitoring: generally parents' phone numbers are set as monitor number. Once the phone number confirmed, the watch will call the monitoring number automatically, please do not make any sound then you will hear the sound around kids. But the watch cannot hear the sound of mobile phone.

c. Synchronization intervals: three models can be chosen according to customer's requirements, the default working mode is every 10 minutes; power saving mode to update location is every 1 hour, and the real-time positioning mode is 1 minute.

d. Class mode: also named No disturbing time, you can set three periods, all incoming calls will be shielded during three periods, this function is suitable for kids on class. Class mode only works from Monday to Friday, weekends are excluded.

e. Notification settings: with low power, SOS, watch removed three alarm messages switches. If the Watch electricity less than 20%, watch removed and press SOS button over 3 minutes, the watch will sent alarm messages to the set number(default off), at the same time send alarm alert to the APP.

f. Phone book: There are 10 contacts can be added and these number can be displayed in the watch. You can click to dial to watch and kids can call them from the watch.

g. Quick connect with your friends: with 2 VT300 watches installed



with the same SIM card operating company, get touch then both phone numbers will be added in the Contact of App.

h. Language and Region: If the time display on the watch is not correct, you can choose the time zone to fix. But this function only works when the watch is connecting to the APP.

i. LBS: The base location positioning function.

j. Activate device-removal sensor: there have sensor on the back side of the watch, open this function, when you take off the watch the alert information will be sent.

k. Remote shutdown: Watch cannot be shut down by pressing button after it starts to work, but it can be turn off from APP.

(4)GEO fence safety area: it's minimum radius is 500 meters, when users go in and out of the fence, there will has alarm information when kids out of the fence.

Note: fence alarm information only when the watch GPS is triggered, base station (LBS)positioning fence has no alarm information.

(5) Love rewards: select the number of red hearts on the app, click the number send to watch, then watch screen will display love heat and the number.

(6) Watch alarm: can be set up three alarm clocks, and alarm clock can be set according to own requirements.

(7)Device: it is to search the watch, when watch is not around, click


this function key the watch will ring for a minute for searching the watch and it will stop ringing by pressing any key.

(8)Footprint: This function is used to check the history route of kids in different period. The location data can be saved up to 90 days.


(9)Display activities: you can see the records of step count, amount of exercise, distance and sleep monitor.

(10)Notification overview: you can see the earlier notifications.

5. "My" interface :Click left side "My" function key at main page and the page shown as below:

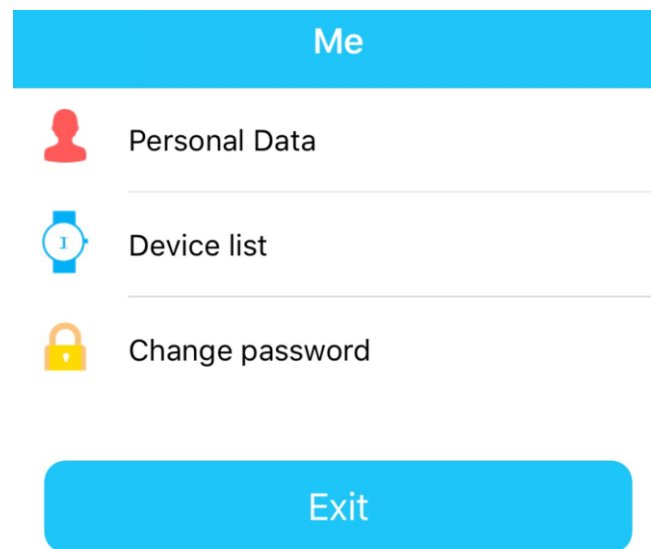


a. On the personal data, you can see the account, ID and phone number. We suggest you fill the email address.

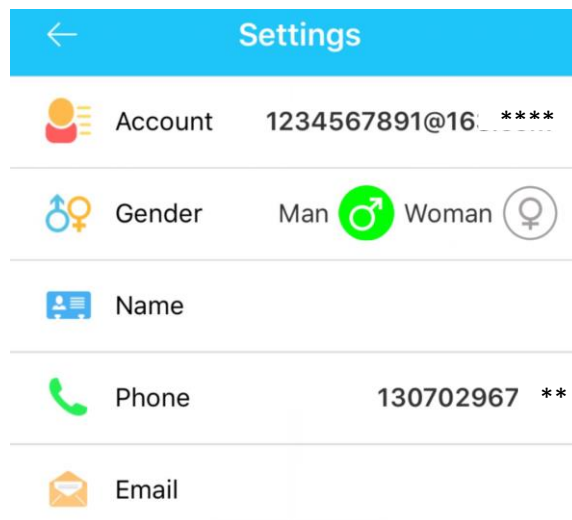

The screenshot shows the 'Settings' screen with a blue header containing a back arrow and the title 'Settings'. Below the header are several settings items, each with an icon and a label:

- Account:** 1234567891@16_****
- Gender:** Man (selected with a green circle) and Woman (with a grey circle)
- Name:** (empty field)
- Phone:** 130702967 **
- Email:** (empty field)


- b. The device list: If you have more than one device to monitor, then you can add them in one account. **Please notice, you just need register one watch then add IDs of other watches here.**

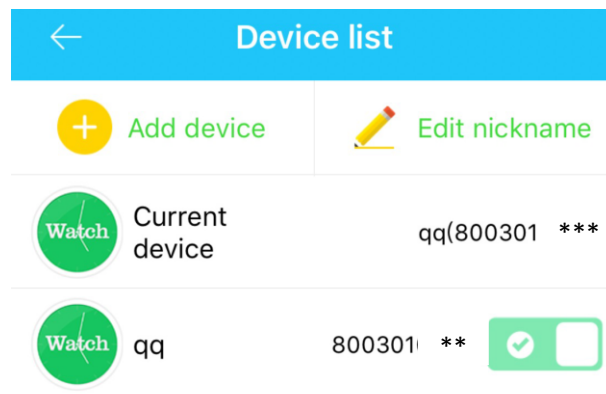

The screenshot shows the 'Device list' screen with a blue header containing a back arrow and the title 'Device list'. Below the header are two buttons: 'Add device' (with a plus icon) and 'Edit nickname' (with a pencil icon). Below these are two device entries, each with a 'Watch' icon:

- Current device:** qq(800301) ***
- Device:** qq, 800301 **, with a green checkmark and a white square button.

- c. "Change the password" function.

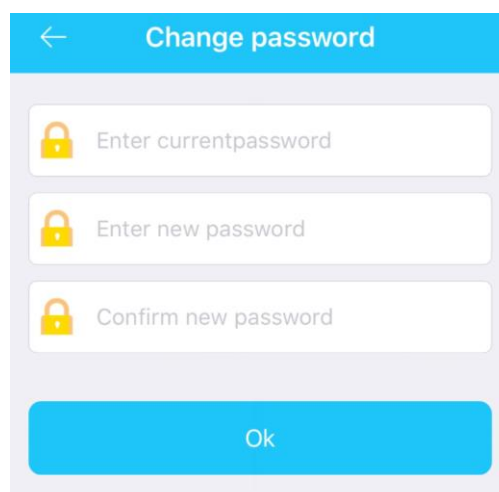

The screenshot shows the 'Change password' screen with a blue header containing a back arrow and the title 'Change password'. Below the header are three input fields, each with a lock icon and a label:

- Enter currentpassword**
- Enter new password**
- Confirm new password**

At the bottom of the screen is a large blue button labeled 'Ok'.



6. Working mode of the watch

Three basic working modes include normal mode, power saving mode and real-time positioning mode. Upload interval is different on different working modes.

Normal mode: upload interval is 10 minutes;

Power saving mode: upload interval is 1 hour;

Real-time positioning: upload interval is 1 minute.

7. Troubleshooting

1. Problem : Can not register an account

An error when entering ID (does not exist or is already registered).


Please contact us directly to resolve the issue on info@safe2go.se and we will provide you with all the necessary technical supports.

2. Problem : The device is not connected to the Internet.

- Check whether your SIM card supports 2G network, for example Telecom is not supportive, and data consumption fee inside.

-Use mobile phone text message to the watch: pw,123456,ts#,in response you will receive SMS message with the specifications, please contact us for support, then we immediately find the cause and solution.

8. Installing SIM card way: Using coin or the hatch opener (backside), insert into the slotted back circular panel like pic1 showing, counterclockwise rotate and remove it like pics2 show, and put micro SIM card inside like pic3, then move back to lock.

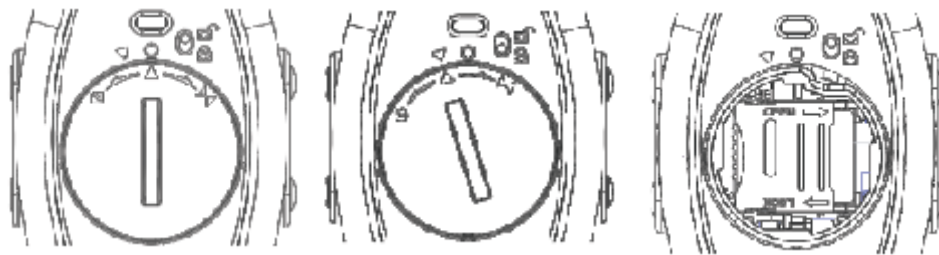

9. Download the APP



Support Android or IOS mobile phone APP: Setracker

Note: The company reserves the right to modify the instruction



contents without any further notice, please understand no further notice about the modification. Part of the function is different in particular software version, but is normal.

